



OLYMPIC WIRE SHELVING

- **Unique Design:** The open wire design of these carbon-steel shelves minimizes dust accumulation and allows a free circulation of air, greater visibility of stored items and greater light penetration.
- **Versatile Construction:** Olympic wire shelving can change as quickly as your needs change.
- **Fast, Secure Assembly:** Posts have circular grooves at 1" (25mm) intervals. A tapered split sleeve snaps together around each post. Tapered openings in the shelf corners slide over the tapered split sleeves providing a positive lock. Shelf is assembled in minutes without the use of any special tools.
- **Shelf Wires:** Run front to back, allowing you to slide items on and off shelves smoothly.
- **Shelf Accessibility:** Shelves can be loaded/unloaded easily from all sides. This open construction allows use of maximum storage space of cube.
- **Adjustability:** Shelves can be adjusted at 1" (25mm) intervals along the entire length of the post.
- **Finish:** Green epoxy finish with chromate substrate.
- **Posts:** Bolt levelers compensate for surface irregularities on stationary posts. Posts also available for mobile application.

OLYMPIC WIRE SHELVING


WIRE SHELVES

(in.)	Width/Length		Approx. Weight Per Shelf		Pack Quantity	Epoxy
	(in.)	(mm)	(lbs.)	(kg)		
14 x 30	355	x 760	7	3.2	4	J1430K
14 x 36	355	x 914	8	3.6	4	J1436K
14 x 42	355	x 1066	9.5	4.3	4	J1442K
14 x 48	355	x 1220	10.5	4.7	4	J1448K
14 x 60	355	x 1524	14	6.3	2	J1460K
14 x 72	355	x 1829	17	7.7	2	J1472K
18 x 24	457	x 610	7	3.2	4	J1824K
18 x 30	457	x 760	8	3.6	4	J1830K
18 x 36	457	x 914	9.5	4.3	4	J1836K
18 x 42	457	x 1066	11	5	4	J1842K
18 x 48	457	x 1220	12	5.4	4	J1848K
18 x 54	457	x 1370	14.5	6.6	2	J1854K
18 x 60	457	x 1524	17	7.7	2	J1860K
18 x 72	457	x 1829	20	9.1	2	J1872K
24 x 24	610	x 610	9	4.1	4	J2424K
24 x 30	610	x 760	11	5.0	4	J2430K
24 x 36	610	x 914	13	5.9	4	J2436K
24 x 42	610	x 1066	15	6.8	4	J2442K
24 x 48	610	x 1220	16	7.3	4	J2448K
24 x 54	610	x 1370	19	8.6	2	J2454K
24 x 60	610	x 1524	21	9.5	2	J2460K
24 x 72	610	x 1829	26	11.8	2	J2472K

Load Capacity:

Up to 48" (1220mm) Length = 800 lbs. (363kg)

54" - 72" (1829mm) Length = 600 lbs. (272kg)

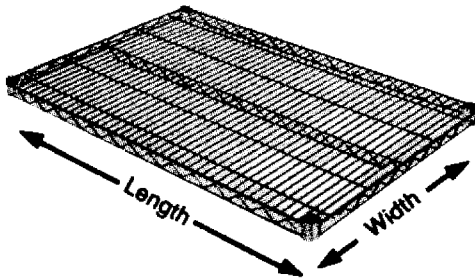

Split Sleeves

POSTS

(in.)	Height * (mm)	Approx. Weight Per Post		Pack Quantity	Cat. No. Epoxy Stationary	Cat. No. Epoxy Mobile
		(lbs.)	(kg)			
34 1/2	875	2	.9	8	J33K	J33UK
62 9/16	1589	3 1/2	1.6	8	J63K	J63UK
74 5/8	1895	4	1.8	8	J74K	J74UK
86 5/8	2200	5	2.3	8	J86K	J86UK

* Height includes leveling bolt and cap.



Posts are grooved at 1" (25mm) increments and numbered at 2" (50mm) increments. Posts are double-grooved every 8" (203mm) for easy identification.